



ZHEJIANG A-CRYSTAL
ELECTRONIC TECHNOLOGY CO., LTD.



Issue	October 9, 2025
Rev.	1.0
Page	5

CRYSTAL UNIT SPECIFICATIONS

客户批准 Customer Approval

(请批准后回签一份 Please Return A Copy With Approval)

Customer	
Customer P/N	
Product	CRYSTAL RESONATORS
Spec	HC-49S/3.072~100.000M
A-Crystal P/N	AH1 Series

Drawn	Checked	Approved
<i>Caogaochang</i>	<i>Fengying</i>	<i>Tanglong</i>



ZHEJIANG A-CRYSTAL

ELECTRONIC TECHNOLOGY CO., LTD.



1. ELECTRICAL SPECIFICATIONS

1.1 Hold Type: HC-49S

No.	Item	Symb	Electrical Specification				Remark
			Min.	Type	Max.	Units	
1	Nominal Frequency	F0	3.072		100.00	MHz	
2	Mode of Vibration	Fundamental △3rd Overtone △5th Overtone					
3	Frequency Tolerance	△F/F0	±10	±30	±50	ppm	at 25℃±3℃
4	Operating Temperature Range	TOPR	-20 -40	-	+70 +85	℃	
5	Frequency Stability	Tc	±30	-	±50	ppm	
6	Storage Temperature	TSTG	-40	-	+85	℃	
7	Load capacitance	CL	6~specify			pF	
8	Equivalent Series Resistance	ESR	Seepage 1			Ω	
9	Drive Level	DL	-	-	100	μW	
10	Insulation Resistance	IR	500	-	-	MΩ	At 100V _{DC}
11	Shunt Capacitance	Co	-	-	7	pF	
12	Aging Per Year	Fa	-5	-	+5	ppm	First Year
13	Package type	11.5*4.65*3.5					

Seepage1


Frequency Range	Mode of Vibration	ESR (Ω) Max
3.000MHz≤F0<4.000MHz	Fund	<150
4.100MHz≤F0<6.000MHz	Fund	<80
6.100MHz≤F0<8.000MHz	Fund	<50
8.100MHz≤F0<16.000MHz	Fund	<40
16.10MHz≤F0<48.000MHz	Fund	<30
24.100MHz≤F0<40.000MHz	3rd OT	<100
40.100MHz≤F0<80.000MHz	3rd OT	<50
50.000MHz≤F0≤100.000MHz	5th OT	<100



ZHEJIANG A-CRYSTAL
ELECTRONIC TECHNOLOGY CO., LTD.




1.2 Dimension (Unit: mm)

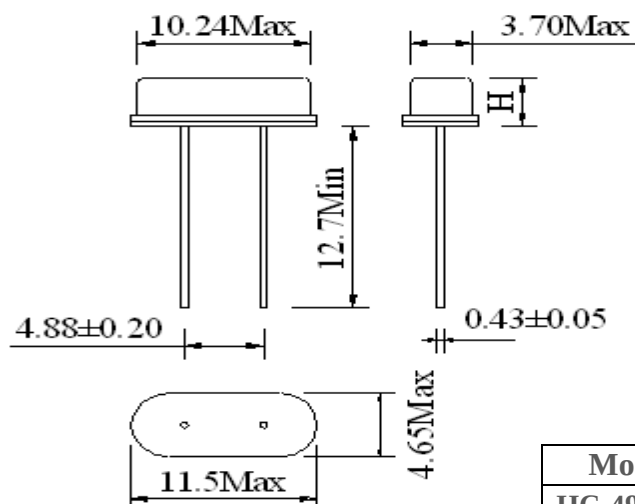

Model	H: (mm)
HC-49SMD	3.5

1.3 The soldering requirements

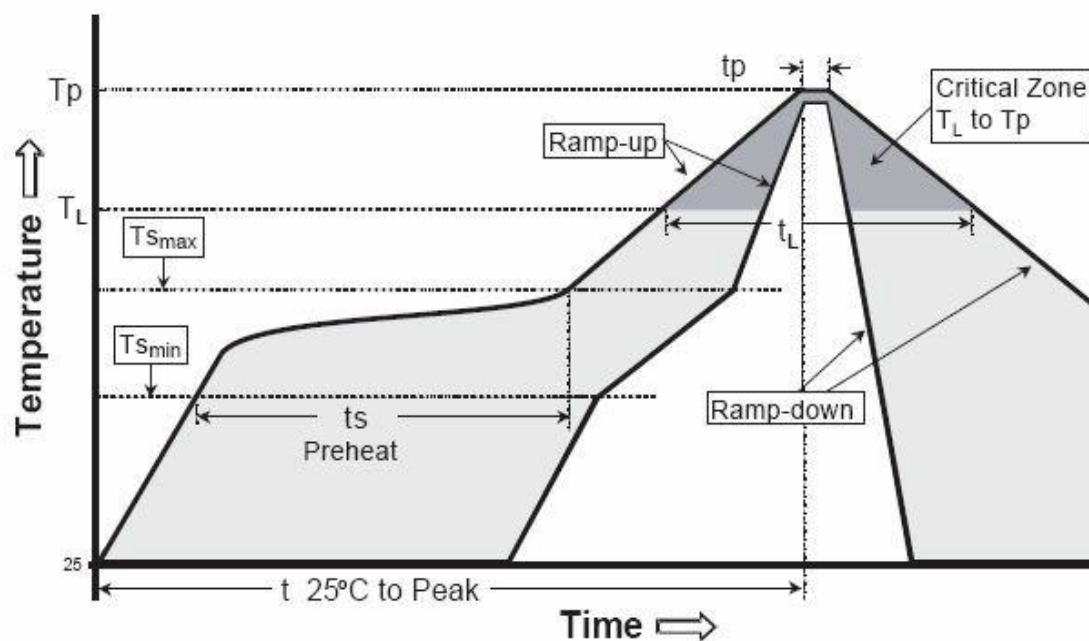

$T_s = 180^\circ\text{C} / 70 \sim 100\text{sec}$, $T_L = 240^\circ\text{C} / 20 \sim 50\text{sec}$, $T_p = 250^\circ\text{C} / 7 \sim 8\text{sec}$



ZHEJIANG A-CRYSTAL
ELECTRONIC TECHNOLOGY CO., LTD.



2. PACKING

2.1 Section of package

Package is made of corrugated paper with thickness of 0.8cm. Package has 10 inner boxes, each box has 10 bag


2.1.1 Quantity of package

Each bag 200 pieces of Crystal Resonators


Per inner box 10 bag (0.2k/bag)

Per package 10 inner boxes & 10 inner boxes
 (20000 pieces of Crystal Resonators)

2.1.2 Inner Box Dimensions (Unit: mm)

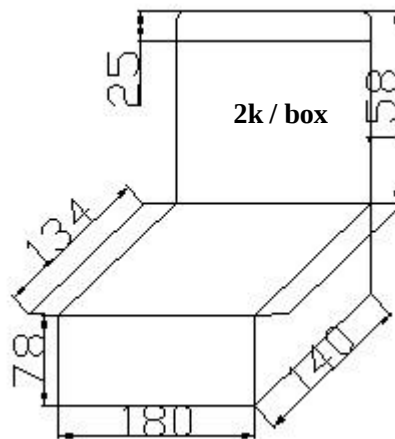

2.1.3 Dimensions and Mark (Unit: mm)

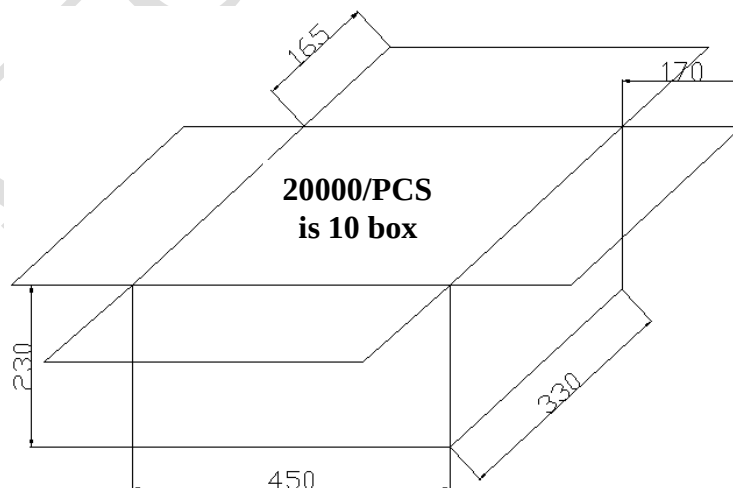



ZHEJIANG A-CRYSTAL
ELECTRONIC TECHNOLOGY CO., LTD.



3. Products Code

3.1 DIP Crystal Resonators/MHz

公司代码 浙江一晶	产 品 型 号 (2 位)	工 作 频 率 (全频点位数)	负 载 电 容 (1 位字母)	调 整 频 差 (1 位字母)	温 度 频 差 (1 位字母)	工 作 温 度 (1 位字母)	其它
A-crystal Logo	Package	Nominal Frequency	Load Capacitance	Frequency Tolerating	Freq Temp Characteristics	Operating Temperture Range	Others
A	H1 (HC-49S)	8.000M	A = 12.5PF	01=5PPM	A=10PPM	1=0~50	Special
		12.000M	B = 10PF	02=10PPM	B=15PPM	2=-10~60	
			C = 9PF	03=20PPM	C=20PPM	3=-10~70	
			D = 8PF	04=30PPM	D=25PPM	4=-20~70	
			E = 7PF	05=40PPM	E=30PPM	5=-30~85	
			F = 6PF	06=50PPM	F=50PPM	6=-40~85	
			G = 16PF	07=100PPM	G=100PPM	7=-40~105	
			H = 18PF			8=-40~125	
			J = 20PF				
			K = 22PF				
			L = 30PF				